

Belt Drive Wholehouse Fans

Features




- 2-Speed motors
- Shutters automatically open when fan is turned on and close tightly when fan is turned off
- 120V, 1-Phase

NOTE: Belt Drive Fan with “No Joist Cut” Shutter.

Standard Models

Fan Dimensions

UPC# 686334	MODEL	SIZE	SPEED	MOTOR HP	CFM @ .1 IN. H2O PRESSURE DROP w/ SHUTTER	FAN SPEED RPM	FAN MOUNTING DIMENSIONS (IN)			EXHAUST SQ. FT. REQ'D	AMPS	WT. (LBS)
							A	B	C			
793629	BD24-2-WHS	24"	2	1/3	4500/2700	612/410	28	29.5	14.5	7	5.7/4.8	40
793636	BD30-2-WHS	30"	2	1/3	7600/5800	520/350	34	35.5	14.5	9	7.5/4.4	50
793643	BD36-2-WHS	36"	2	1/3	9675/6400	395/265	40	41.5	14.5	12	6.3/3.1	64

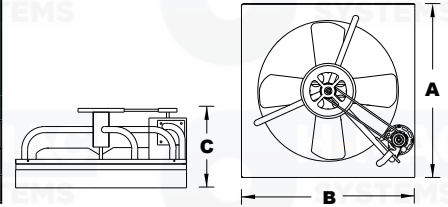

Ceiling Shutters

Control Options

UPC# 686334	MODEL	FIT HOLE SIZE (I.D.)	OUTSIDE SIZE (O.D.)	FAN SIZE	SHIPPING WT. (LBS)
794480	CS-10-W	26X26	28X28	24"	8
794466	CS-13-W	32X34	34X36	30"	10
794534	CS-14-W	34X34	36X36	30"	10
794473	CS-18-W	32X43	34X45	36"	11
794527	CS-19-W	34X43	36X45	36"	11

UPC# 686334	MODEL	DESCRIPTION	WGHT. LBS.
792707	2-SW	2 Speed wall switch & plate	1
500081	1A22-7	SP Close on rise (Attic Thermostat) (90°-130°F)	1
500036	1A22-8	SP Close on rise (Ivory Whole House Thermostat) (50°-90°F)	1.5
500005	1A22-8W	SP Close on rise (White Whole House Thermostat) (50°-90°F)	1.5

“Joist out style” (For replacement only)